



UltraLife series is designed for a long term surveillance usage. This module is equipped with low PIR sensor that allows you to monitor places with low activity movements for a long period of time. The module is placed manually to the covert PIR module, which makes it virtually unrecognizable from the real PIR module = sensor.

QUICK SET-UP GUIDE:

IMPORTANT

- In order to change any settings like, time, date, type of recording or quality, you will have to enter OSD menu, this has to be done via attached cable.
- It comes standardly in PIR mode detection preset and HD resolution
- To access OSD menu you have to connect AV cable (resolution, time, length of recordings)
- You also need external display to access the OSD menu
- By pressing PIR button you will enter STAND BY mode (you can make pictures etc. with remote)

STEP 1

SETTING UP

- Place in SD Card → Turn On → MODULE IS IN PIR MODE
- You can deactivate the PIR Mode by pressing PIR button → YOU WILL ENTER STANDBY

STEP 2

CONNECTING TO OSD MENU

- Connect with AV cable
- Press MENU and navigate through the menu with Remote

STEP 3

MOUNTING

- Place the camera in your designated spot, charging battery can take up to 10 hours.

DIODE SIGNALS

DIODE

GREEN light

1X FLASH **RED**

GREEN AND **RED** 3x Flashing

YELLOW 3sec + **GREEN** 2sec

3x FLASH **GREEN**

3x FLASH **RED**

3x **YELLOW**

GREEN FLASHING

FUNCTION

Stand-by

Taking picture

Not charged / shutting down

Turning on

Continuous recording


Recording in PIR activation (best battery)

Motion Detection (worse battery)


SD Card is not inserted

PACKAGE CONTENT

- 1x Stronic UltraLife
- 1x Remote control
- 1x AV out Cable
- 1x Charging cable
- 1x USB Charger



	32GB card		
	Hours	bitrate	fps
2304x1296	6.0	20 127	30
1280x720	11.0	19846	23
720x480	25.0	8765	22
640x480	40.0	7864	22

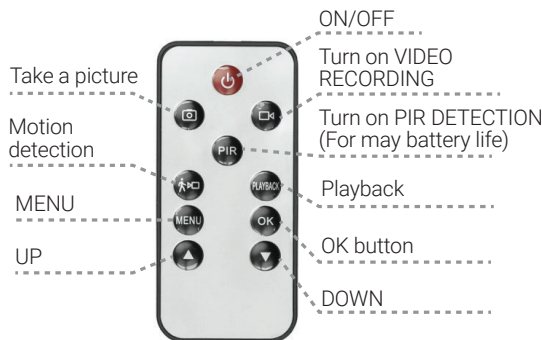

TIME SETTING

After you will the unit via supplied video cable, you will be able to change all the setting including date and time.



USEFUL INFORMATION

If battery is fully discharged, charging will start 3 min after connecting the device into power supply.

We recommend to format battery before you start using the device. Charge the device at least 6hours and then let it discharged. Repeat three times. After device will be fully formatted, charge it for 5 hours, ideally. Record a sample video, to test the device under various light conditions.

Parameters

Image Sensor
Effective Pixels

Values

1/4 inch
2304x1296, 1280x720px; 720x480px;
640x480px

Video Compression

MJPEG

Recording Video Format

.avi

Minimum illumination

1.0 Lux

Lens

pinhole

Viewing angle

70°

Recording Speed

30 FPS

Photo Resolution

JPEG 1600x1200

Memory Slot

SDHC (Supports up to 32GB, not included)

File Overwrite

Yes

Power consumption

Max 300mA 5V

Operating temperature

-10 ~ 50 °C (+14 ~ 122 °F)

PIR activation delay

7 seconds

Consumption in PIR

7mAh

DISCLAIMER

This user manual can be slightly different from specific product. Before start using the device, check your local legal terms. Neither supplier nor distributor don't assume and responsibility for using device in conflict with local law.