

**SECU08W-2K**



**SECU15W-2K**



**SECU22W-2K**





[Link to a video](#)

## 1. Contents of the package

- Camera
- Adapter
- Charging cable
- Wall bracket

## 2. Description of the device



1. IR illuminator
2. PIR sensor
3. ON/OFF switch
4. Camera lens
5. RESET button
6. Charging connector
7. Microphone
8. Extension for wall bracket




[Link to a video](#)

## 1. Contents of the package

- Camera
- Adapter
- Charging cable

## 2. Description of the device

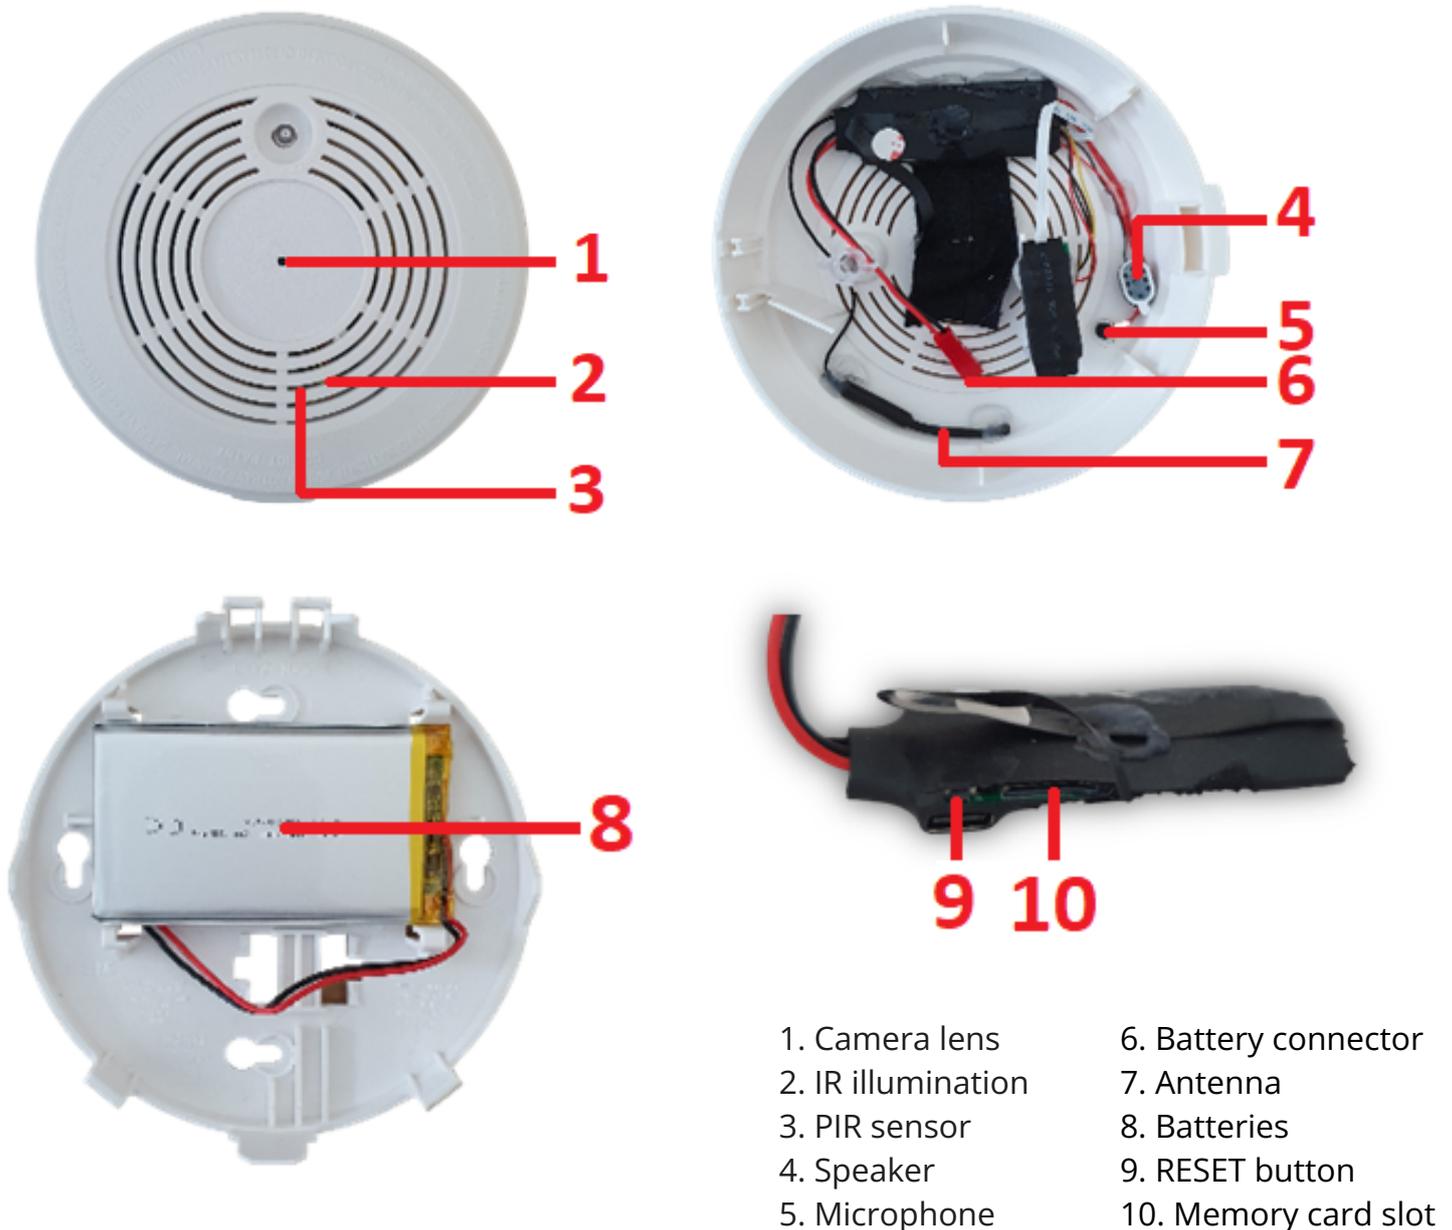




[Link to a video](#)

## 1. Contents of the package

- Camera
- Adapter
- Charging cable

## 2. Description of the device

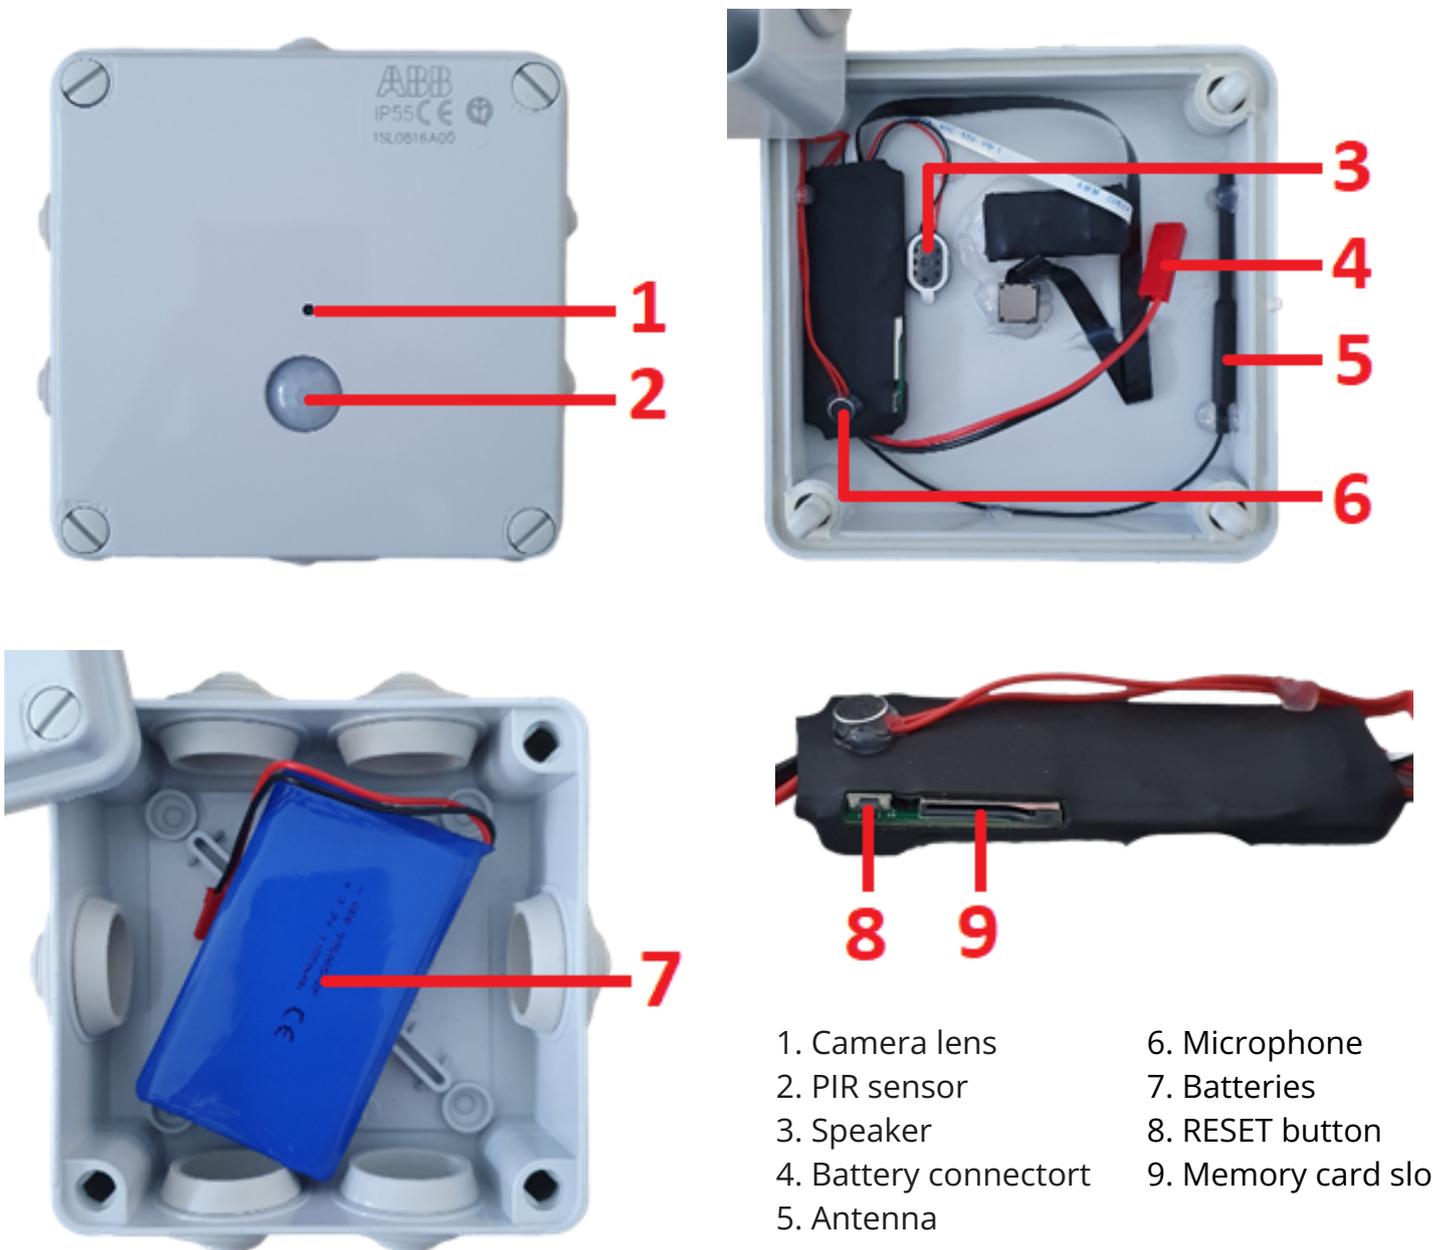

## 3. Quick start

1. Switch the ON/OFF switch to the ON position (up)
2. Hold down the RESET button to reset the device to factory settings
3. Pair your camera with the Tuya app for live streaming

## 4. Connecting to the app

a) Download the free "Tuya" app to your mobile phone via the App Store or Google play



b) Launch the "Tuya" app and click on the "register" icon




c) Select registration by email or phone number




d) You will then receive a verification code by email or phone. Fill in the verification code and enter your password to complete your registration.


e) Then click on the "create family" icon where you can **set the household area**, family name or address. To save your parameter settings, click on the "Done" button.

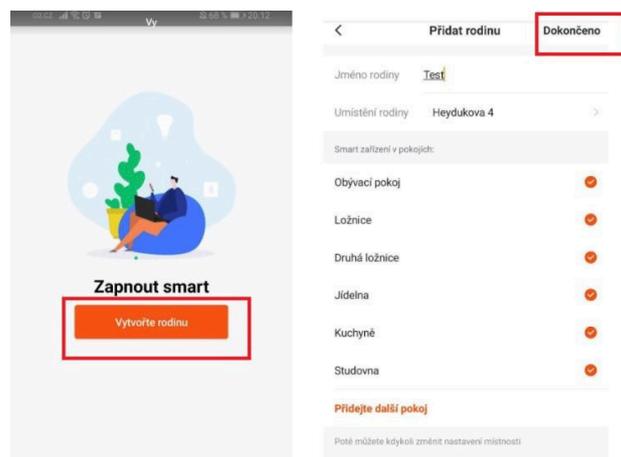

- f) Hold the RESET button on the device for 5 seconds until the beep sounds.
- g) In the app, select Add Device (+ or Add Device icon).
- h) Then select "Camera and lock" and "Camera (Wi-Fi)".

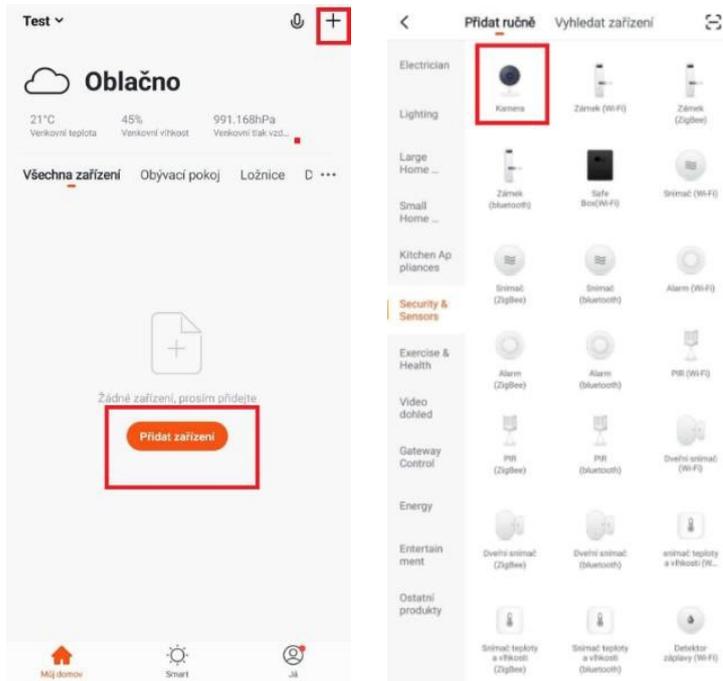


- i) Click "**Next**" and you will then be prompted to enter your local WiFi network and its password (2.4Ghz band is supported). Once entered, confirm the action by clicking "OK".
- j) Then click on the "**Continue**" button.

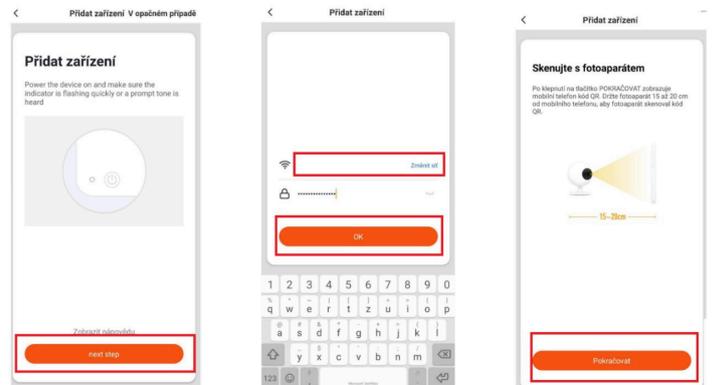


- k) A **QR code** will now be generated, point it towards the lens of the device and wait until you hear a beep.

- l) When the beep sounds, click on the "**beep**" icon. Then wait for the device to pair with the app. Successful pairing is again indicated by an audible beep.

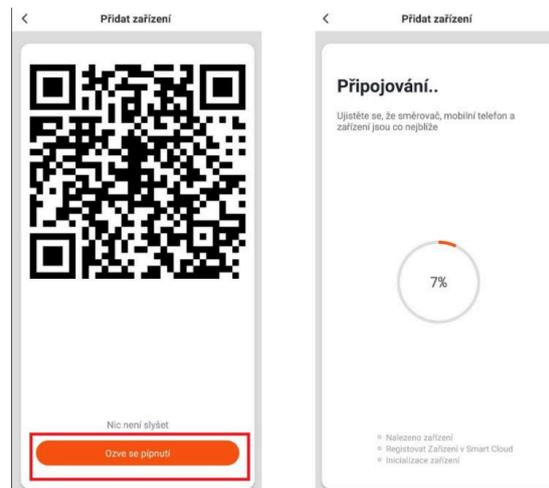

m) Then press the **"Done"** button to complete the action.


n) The device has been successfully added.

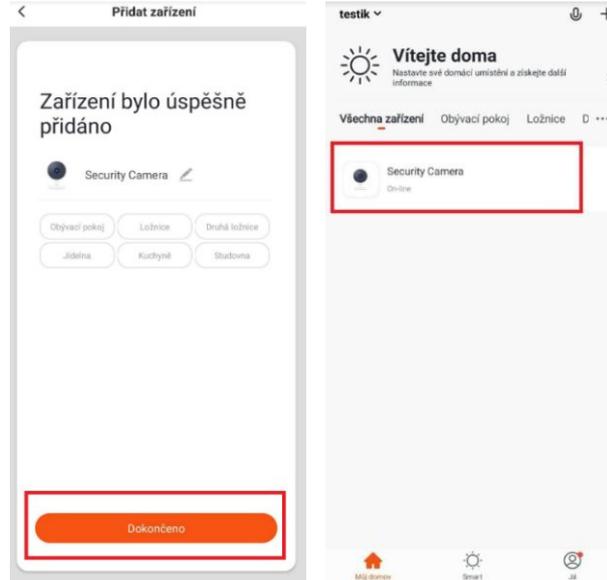

## 5. Introduction of functions

1. Live preview
2. Settings
3. Full screen mode - landscape
4. Taking a picture in your phone's memory
5. Communication with the counterparty
6. Acquire a video recording to the phone's memory
7. Advanced settings
8. Playing back recordings from the device's SD card
9. Gallery of records stored in your phone
10. Menu colour
11. Device volume
12. Turning motion detection on/off
13. Siren activation
14. Notification

For a live preview and to use all functions, you must select the camera in the list.

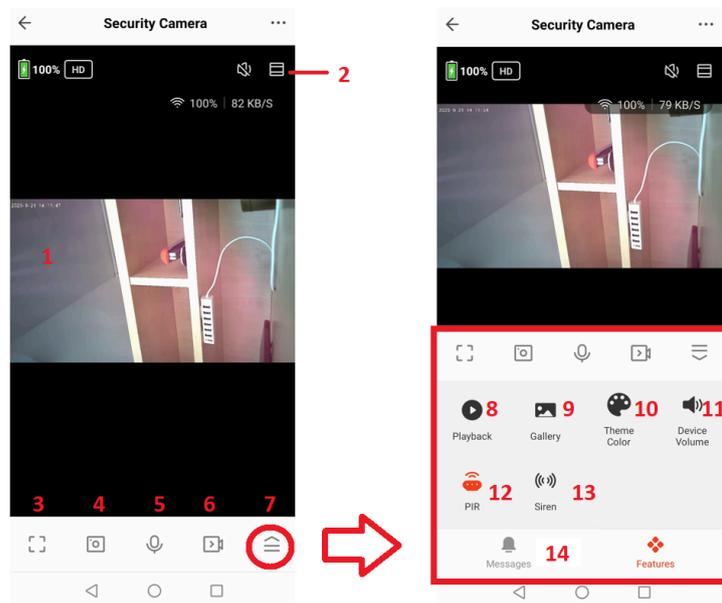

## 6. Final provisions

Operation of the instrument may vary slightly from series to series. Use the device in accordance with the applicable legislation. The supplier accepts no liability for use of the instrument in contravention of these regulations. The manual is the property of SHX Trading s.r.o. Any copying or other use must be with the permission of this company. If you find any inaccuracies in the instructions, we will be happy to be informed.

